



1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30	31	32	33	34	35	36	37	38	39	40	41	42	43	44	45	46	47	48	49	50	51	52	53	54	55	56	57	58	59	60	61	62	63	64	65	66	67	68	69	70	71	72	73	74	75	76	77	78	79	80	81	82	83	84	85	86	87	88	89	90	91	92	93	94	95	96	97	98	99	100	101	102	103	104	105	106	107	108	109	110	111	112	113	114	115	116	117	118	119	120	121	122	123	124	125	126	127	128	129	130	131	132	133	134	135	136	137	138	139	140	141	142	143	144	145	146	147	148	149	150	151	152	153	154	155	156	157	158	159	160	161	162	163	164	165	166	167	168	169	170	171	172	173	174	175	176	177	178	179	180	181	182	183	184	185	186	187	188	189	190	191	192	193	194	195	196	197	198	199	200	201	202	203	204	205	206	207	208	209	210	211	212	213	214	215	216	217	218	219	220	221	222	223	224	225	226	227	228	229	230	231	232	233	234	235	236	237	238	239	240	241	242	243	244	245	246	247	248	249	250	251	252	253	254	255	256	257	258	259	260	261	262	263	264	265	266	267	268	269	270	271	272	273	274	275	276	277	278	279	280	281	282	283	284	285	286	287	288	289	290	291	292	293	294	295	296	297	298	299	300	301	302	303	304	305	306	307	308	309	310	311	312	313	314	315	316	317	318	319	320	321	322	323	324	325	326	327	328	329	330	331	332	333	334	335	336	337	338	339	340	341	342	343	344	345	346	347	348	349	350	351	352	353	354	355	356	357	358	359	360	361	362	363	364	365	366	367	368	369	370	371	372	373	374	375	376	377	378	379	380	381	382	383	384	385	386	387	388	389	390	391	392	393	394	395	396	397	398	399	400	401	402	403	404	405	406	407	408	409	410	411	412	413	414	415	416	417	418	419	420	421	422	423	424	425	426	427	428	429	430	431	432	433	434	435	436	437	438	439	440	441	442	443	444	445	446	447	448	449	450	451	452	453	454	455	456	457	458	459	460	461	462	463	464	465	466	467	468	469	470	471	472	473	474	475	476	477	478	479	480	481	482	483	484	485	486	487	488	489	490	491	492	493	494	495	496	497	498	499	500	501	502	503	504	505	506	507	508	509	510	511	512	513	514	515	516	517	518	519	520	521	522	523	524	5
---	---	---	---	---	---	---	---	---	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	-----	---

(11) **EP 0 695 569 A1**



1/60 second (one field) or in a scanning cycle of 1/30 second (one frame). Electrical signals converted to have level corresponding to amounts of light received by the respective photoelectric conversion elements are output from the TV camera 1 (2). The TV camera 1 (2) used in this embodiment has an infrared transmitter filter disposed on its light receiving surface so that it receives only the infrared radiations in a specified frequency band. This prevents an erroneous operation caused by external light. In this embodiment, the upper surface of the base P is divided into two areas and the two TV cameras 1, 2 pick up images in their corresponding areas. However, the upper surface of the base P may be divided into a plurality of areas more than two and the respective TV cameras may pick up images in their corresponding areas. In this way, the resolution of the picked up images, i.e., the position detection accuracy can be improved, while realizing the race track RC in an expanded area.

The boards 10, 20 are connected to the TV cameras 1 and 2, respectively. The boards 10, 20 each are internally provided with the electrical circuit for detecting the car 3, which will be described later with reference to Figs. 4 and 5.

The monitors 100, 200 are not needed during the game, but are adapted to display auxiliary members for position adjustment, i.e., LED1, LED2 and LED3, which are used to adjust the direction of the TV cameras 1 and 2 in the production and maintenance, or to display a detecting state of the car 3 for confirmation.

The transmission LEDs 7 are light emitting devices for emitting, for example, infrared radiations. Similar to the TV camera 1 (2), the LEDs 7 are disposed at specified height from the base P with the light emitting portions faced downward. The infrared signals from the LEDs 7 are directed at the car 3 running on the race track RC and propagates while spreading at a specified angle. Only one transmission LED 7 may be disposed in the center position. In order to make the signal transmission reliable, two LEDs may be disposed to cover the respective areas defined by dividing the surface of the base P into two parts. In this embodiment, four LEDs are disposed serially to cover the respective areas defined by dividing the surface of the base P into four parts. With a plurality of LEDs 7, the transmission unit 6 transmits a synchronized optical pulse signal to the respective LEDs 7 connected in serial therewith. Thus, even if the areas covered by the respective LEDs 7 partially overlap, no interference occurs, with the result that the occurrence of the erroneous operation can be prevented. In place of the connecting method shown in Fig. 1, the LEDs 7 may be connected in parallel so as to suppress the influence of impedance more effectively, or may be serially connected via drivers (using shield wires) so as to suppress the influence of impedance and to prevent the noise generation. The connecting method shown in Fig. 1 is advantageous as compared with the other connecting methods in that the wiring construction is simplified.

Fig. 3 is a block diagram showing the construction of the car 3.

The car 3 has an unillustrated body, which has a so-called three-point support structure. In other words, wheels 311, 312 are rotatably mounted at the opposite lateral sides of the front side of the car body, and an unillustrated ball (ball caster) is disposed in the center of the rear (or front) side of the car body. This ball is fitted in a partially spherical hole which is formed on the bottom surface of the car body so as to volumetrically accommodate at least the half of the ball. The ball is rollable by 360 degrees. By adopting the three-point support structure, the slip of the car body can be effectively simulated. In place of the ball, rotatable wheels may be mounted at the opposite lateral sides.

The car 3 includes motors 313 and 314 for driving the wheels 311 and 312 formed of resin or like material, respectively. DC motors are used as the motors 313 and 314. The speed of the car 3 is duty-controlled and, if necessary, the car 3 is caused to run backward (by inverting the polarity of a supply current). Alternatively, pulse motors capable of controlling the speed using a pulse frequency may be used. A plurality of reduction gears are mounted between rotatable shafts of the motors 313 and 314 and those of the wheels 311 and 312 so that a specified speed range is obtainable. Further, rotating speed detectors 315 and 316 for detecting the rotating speed of the motors 313 and 314, respectively, are provided so as to feedback-control the speed of the car 3. The detectors 315, 316 include rotating plates 315a, 316a formed with perforations at specified intervals in their circumferential direction and which are rotatably mounted on the rotatable shafts of the motors 313 and 314, and photointerrupters 315b, 316b disposed to hold the rotating plates 315a, 316a therebetween to detect the perforations formed in the plates 315a, 316a, respectively.

Indicated at 317 is a one-chip microcomputer as a controller for the car 3. The microcomputer 317 analyzes the signals transmitted from the LEDs 7 of the machine main body to generate a running control signal for the car 3, and causes front and rear LEDs 318 and 319 to emit infrared radiations. Its operation program is stored in a ROM 320. Indicated at 313a and 314a are amplifiers for amplifying the speed control signals output from the microcomputer 317 and sending the amplified signals to the motors 313 and 314, respectively.

As shown in Figs. 1 and 3, the front LED 318 is disposed in the center of the front part of the car 3, whereas the rear LED 319 is disposed in the center of the rear part of the car 3. These LEDs 318 and 319 face straight above. The frequency band of the infrared radiations emitted from the LEDs 318 and 319 coincides with the transmission frequency band of the infrared transmitter filter disposed on the front surface of the TV cameras 1 and 2. The LEDs 318 and 319 are constructed such that the light emitted therefrom propagate while spreading at a wide angle. Thus, the image of the car 3 in any arbitrary position on the base P can be picked up by the TV cameras 1 and 2.

Referring back to Fig. 3, indicated at 321 is an infrared receiving unit which includes a photodiode or like device for receiving the optical pulse signals transmitted from the LEDs 7. The unit 321 is disposed, for example, in the middle of the top of the car 3 with faced upward. This photodiode is, for example, exposed so that it can receive the light from the wide range of directions. Indicated at 322 is a storage battery including a Ni-Cd battery capable of storing and releasing

Fig. 6 is a detailed circuit diagram of the binary processing circuit 19, and Fig. 7 is a timing chart showing its operation. In Fig. 6, indicated at 191 is an amplifier for amplifying an NTSC signal including image data from the TV camera 1 (2), and the thus amplified signal is converted into a signal having a specified voltage level by a circuit 192 including an AC coupling circuit. The thus converted signal is output to a noninverting input terminal of a comparator 193 including an operational amplifier. A D/A converter 194 is a digital-to-analog converting circuit and is adapted to convert a threshold data of, e.g., 8 bits input from the microcomputer 40 into an analog signal and to output the resultant signal to the inverting input terminal of the comparator 193. The comparator 193 outputs a signal of high level if the level of the NTSC signal is a threshold level or higher, and the output data thereof is sent to a serial parallel converter 195. The serial parallel converter 195 converts the received binary data into a data consisting of 8 bits in synchronization with a sampling clock and outputs the converted data to a latch circuit 196. The latch circuit 196 latches and outputs this signal to the frame memory unit 11. The binary parallel data is written in the frame memory unit 11 at a timing when a write pulse (bar WR) output during the reading of the data for 8 pixels is sent.

Accordingly, as shown in Fig. 7, the data is written such that the pixels of the TV camera 1 correspond to the addresses of the frame memory unit 11: the data from the first pixel (data of ADD0) is written in an address ADD0, a data of ADD1 in an address ADD1, a data of ADD2 in an address ADD2, and so on. The employment of the D/A converter 194 in the binary processing circuit 19 to compare the levels in an analog manner enables the use of a threshold data consisting of a larger number of bits as compared with a conventional case where the digital data are compared for the NTSC signal in the high frequency band. Thus, the resolution of the level comparison can be advantageously enhanced. It will be appreciated that the invention does not deny the employment of the conventional circuit construction for comparing the digital data, and that either one of the constructions is employed in view of a required resolution accuracy.

Figs. 8A to 8C are diagrams showing the operation of the data reading circuit 18, Fig. 8A showing a base located within a view of a TV camera, Fig. 8B showing storage contents of a frame memory in the state shown in Fig. 8A, and Fig. 8C enlargedly showing a trace block BL1.

In Fig. 8A, one car 3 is located on the base P, and the front and rear LEDs 318 and 319 are on. In Fig. 8B, LED pixel data D1 and D2 corresponding to the front and rear LEDs 318 and 319 are stored at high level. BL1 and BL2 denote trace blocks.

In Fig. 8C, checkers within the trace block BL1 represent the pixels of the TV camera 1, i.e., the respective addresses of the frame memory unit 11. In this embodiment, there is adopted a square trace block having a side which is at least twice as long as a distance the car 3 moves in one field cycle (half the frame cycle). In this way, the movement of the car in 360° directions can be more securely traced. The upper left end (Hs, Vs) of the trace block BL1 is a starting address of the trace block BL1, which is set by the start setting circuit 141. The H-, V-counter 142 designates the addresses in a row direction (a direction indicated by an arrow in Fig. 8C) from the starting address (Hs, Vs), i.e., (Hs+1, Vs), ..., (Hs+d, Vs). Upon the completion of one row, the address proceeds to the next row. The address designation ends at an end address (Hs+d, Vs+d). In this way, the trace block BL1 of dxd (referred to as a trace block size BS hereinafter) is designated.

By selecting the shape of the focus lens disposed on the sensing surface of the TV camera 1 and the shape and luminance of the front and rear LEDs 318 and 319, the LED data D1 may be stored over a plurality of addresses (as in a hatched portion in Fig. 8C). By obtaining a plurality of dots, the LED data can be made distinguishable from other noises.

The integration is described with reference to Figs. 5 and 8C. Upon the address designation of the trace block BL1 from the read address generator 14, stored contents of the addresses are successively read from the frame memory 111 (or 112). Simultaneously, the read addresses are sent to the adding circuit 181.

Each time one dot (high level data) as the LED data D1 is read from the frame memory 111, the count value of the dot counter 183 is incremented and the read dot is sent to the latch circuit 182. Only when receiving the dot data, the latch circuit 182 latches the address value output from the adding circuit 181 and sends the address value back to the adding circuit 181. In this way, each time the dot data is output from the frame memory 111, the address value for storing this dot data is output to the adding circuit 181 and integrated therein.

As a result, the number of dots existing in the trace block BL1 and the integration value of the addresses for these dots are obtained in the dot counter 183 and the latch circuit 182, respectively. Upon the completion of the address designation of the trace block BL1, the microcomputer 40 reads the data obtained in the latch circuit 182 and the dot counter 183, and judges based on the dot number whether the data is a LED data or a noise. A center address (Hc, Vc) of the dots is calculated by dividing the integration value by the dot number. The center address is assumed to be the position of the front LED 318. In accordance with this position data, the trace block is set and the running control signal for the car is generated.

The judgment as to whether the data is a LED data or a noise may be made as follows. A threshold dot number is set, and the data having the dot number which is not smaller than the threshold value is judged to be the LED data.

Further, the center address may be calculated by the hardware, and the H-, V-coordinates calculation results may be sent to the microcomputer 40. Instead of the use of absolute coordinates in calculating the integration value of the coordinates, relative coordinates from reference coordinates may be used. In this case, target coordinates are obtained

results obtained by Equations 1 and 2.

EQUATION 1:

$$h_{10} = \frac{(h_{11}^2 + v_{11}^2)(v_{12} - v_{13}) + (h_{12}^2 + v_{12}^2)(v_{13} - v_{11}) + (h_{13}^2 + v_{13}^2)(v_{11} - v_{12})}{2 \cdot h_{11}(v_{12} - v_{13}) + 2 \cdot h_{12}(v_{13} - v_{11}) + 2 \cdot h_{13}(v_{11} - v_{12})}$$

$$v_{10} = \frac{(h_{11}^2 + v_{11}^2)(h_{13} - h_{12}) + (h_{12}^2 + v_{12}^2)(h_{11} - h_{13}) + (h_{13}^2 + v_{13}^2)(h_{12} - h_{11})}{2 \cdot h_{11}(v_{12} - v_{13}) + 2 \cdot h_{12}(v_{13} - v_{11}) + 2 \cdot h_{13}(v_{11} - v_{12})}$$

$$r_{10} = \sqrt{(h_{10} - h_{11})^2 + (v_{10} - v_{11})^2}$$

EQUATION 2:

$$h_{20} = \frac{(h_{21}^2 + v_{21}^2)(v_{22} - v_{23}) + (h_{22}^2 + v_{22}^2)(v_{23} - v_{21}) + (h_{23}^2 + v_{23}^2)(v_{21} - v_{22})}{2 \cdot h_{21}(v_{22} - v_{23}) + 2 \cdot h_{22}(v_{23} - v_{21}) + 2 \cdot h_{23}(v_{21} - v_{22})}$$

$$v_{20} = \frac{(h_{21}^2 + v_{21}^2)(h_{23} - h_{22}) + (h_{22}^2 + v_{22}^2)(h_{21} - h_{23}) + (h_{23}^2 + v_{23}^2)(h_{22} - h_{21})}{2 \cdot h_{21}(v_{22} - v_{23}) + 2 \cdot h_{22}(v_{23} - v_{21}) + 2 \cdot h_{23}(v_{21} - v_{22})}$$

$$r_{20} = \sqrt{(h_{20} - h_{21})^2 + (v_{20} - v_{21})^2}$$

In this way, the trace block 8L can be properly set irrespective of the detected position of the car 3, thereby enabling secure trace of the car 3.

Fig. 14 is a flowchart showing a measurement of the position of the TV cameras 1 and 2.

The TV cameras 1 and 2 are positioned to pick up images of the LED1, LED2, and LED3 which are disposed at the predetermined positions of the base P. The microcomputer 40 first renders the TV camera 1 pick up images of the LED1, LED2, and LED3 and then write their respective image data in the frame memory unit 11 (Step S2). The microcomputer 40 calculates addresses (h11, v11), (h12, v12), and (h13, v13) of images of the LED1, LED2, and LED3 by scanning the frame memory unit 11 (Step S4). Specifically, the address calculation is executed as follows: the frame memory unit 11 is scanned; the continuity of dots (high level data) is detected using a known method; the number of dots in a detected continuity region is counted; and a center position of the region is calculated. This calculation is similar to an initial position recognition which will be described later.

Similarly, the microcomputer 40 renders the TV camera 2 pick up images of the LED1, LED2, and LED3 and then write their respective image data in the frame memory unit 21 (Step S6). The microcomputer 40 calculates addresses (h21, v21), (h22, v22), and (h23, v23) of images of the LED1, LED2, and LED3 by scanning the frame memory unit 21 (Step S8).

Subsequently, a segment connecting the point (h11, v11) and the point (h21, v21), a segment connecting the point (h12, v12) and the point (h22, v22), and a segment connecting the point (h13, v13) and the point (h23, v23) are displayed on the game monitor 5 (Step S10). It is judged whether  $v11 = v21$ ,  $v12 = v22$ ,  $v13 = v23$  (Step S12). If it is judged that  $v11 = v21$ ,  $v12 = v22$ , and  $v13 = v23$  (YES in Step S12), a distance  $d$  between the addresses (h12, v12) and (h22, v22) of the images of the LED2 is calculated as:  $d = 512 \cdot v12 - v22$ , and the calculated distance  $d$  is displayed (Step S14).

In Step S16, it is judged whether a break-off key is turned on (Step S16). The break-off key is provided in the operation panel. This judgment is performed because there is the possibility that an operator requests break-off of this flow to adjust the position of the TV cameras 1 and 2 after obtaining the results of Steps S12 and S14, i.e., when it is judged that the condition of  $v11 = v21$ ,  $v12 = v22$ ,  $v13 = v23$  cannot be attained, or when it is found that the calculated distance  $d$  is not within the predetermined value. As mentioned above, the conditions of  $v11 = v21$ ,  $v12 = v22$ ,  $v13 = v23$  and  $BS \leq \min(D(v))$  are necessary for the address unification. If it is judged that the break-off is requested (YES in Step S16), this routine ends.

It may be appreciated that the operations of Steps S2 to S14 is repeated after the adjustment of the TV cameras 1 and 2 is completed and the break-off key is turned on again.

If it is judged that  $v11 = v21$ ,  $v12 = v22$ , and  $v13 = v23$  (YES in Step S12), and it is found that the distance  $d$  is within the predetermined value, and the break-off key is not turned on (NO in Step S16), the value  $h10$ ,  $h20$ ,  $v10$ ,  $v20$ ,  $r10$ , and  $r20$  are calculated based on Equations 1 and 2 (Step S18). Thus calculated  $r10$ ,  $r20$ ,  $v10$ , and  $(h10 - h20)$  are stored in the system parameter file (Step S20), and this routine ends.

Figs. 15 and 16 are a main flowchart showing operations of the game machine provided with the system for detecting the position of the movable object in a non-contact state. In this game machine, e.g., 8 cars are used and identification numbers ID No.i ( $i=0$  to 7) are given in advance to the respective cars 3 by setting dip switches provided therein.

This flowchart starts after the specified operation, e.g., insertion of a medal, or input of a predicted ranking is detected and the race development is set. First, the entire system is initialized, and the communication ports of the microcomputer 40 and the main controller 4 are initialized (Steps S30 and S32). The trace block size BS is set (Step S34), and the distance  $D(v)$  is calculated (Step S36). The calculation of the distance  $D(v)$  will be described later.

Command signals are generated to turn off the front and rear LEDs 318 and 319 of all the cars 3, and are sent to all the cars 3 via the transmission LEDs 7 (Step S38).

A count value  $i$  of the counter is set to 0 (Step S40), and a command signal is generated to turn on the front LED 318 of the car of ID No.0, and is transmitted to this car via the transmission LEDs 7 (Step S42). The microcomputer 317 of the car of ID No.0 recognizes that the transmission command is directed to it, and turns only the front LED 318 on. On the other hand, after waiting for a time which is required for the luminance of front LED 318 to reach a specified level e.g., for a time corresponding to 2 frame cycles following the transmission of the command signal (Step S44), the microcomputer 40 calculates the center of gravity position to recognize an initial position of the front LED 318 of the car of ID No.0 (Step S46). This center of gravity position calculation is described in detail later. The obtained center of gravity data ( $Hc$ ,  $Vc$ ) is stored in the form of  $FH[i]$ ,  $FV[i]$  ( $F$  denotes forward) in a RAM or the like as a buffer (Step S48).

Upon the completion of the storage of the center of gravity data, a command signal is generated to turn on the rear LED 319 of the car of ID No.0, and is transmitted to this car via the transmission LEDs 7 (Step S50). The microcomputer 317 of the car of ID No.0 recognizes that the transmission command is directed to it, and turns only the rear LED 319 on (in other words, the microcomputer 317 of the car of ID No.0 turns the front LED 318 off). On the other hand, after waiting for 2 frame cycles following the transmission of the command signal (Step S52), the microcomputer 40 calculates the center of gravity to recognize an initial position of the rear LED 319 of the car of ID No.0 (Step S54). The obtained center of gravity data ( $Hc$ ,  $Vc$ ) is stored in the form of  $BH[i]$ ,  $BV[i]$  ( $B$  denotes back) in a RAM or the like (Step S56). Upon the completion of the storage of the center of gravity data of the front and rear LEDs 318 and 319, command signals

The above calculation result and the contents of the board identification flag BDF are stored in the buffer (Step S162). The noise level at this stage is stored as a system parameter (Step S164), and this subroutine returns.

In Step S130, on the other hand, if the label number is 1 (YES in Step S130), the center of gravity coordinates  $H_c$ ,  $V_c$  are calculated assuming that one effective label is the front LED 318 (or the rear LED 319) (Step S152), and the calculation result and the contents of the board identification flag BDF are stored in the buffer (Step S162). The noise level at this stage is stored as a system parameter (Step S164), and this subroutine returns.

Fig. 16 is a flowchart showing the operations carried out in response to Interrupts I and II, particularly after the interrupt is enabled in Step S68.

The Interrupt I is described with reference to Fig. 20. The Interrupt I is started in response to an interrupt signal generated each time the reading of the image data in the frame memory units 11 and 21 in the boards 10 and 20 is completed. First, the frame memory unit 11 in the board 10 is switched to the frame memory 111 (or 112) in which the image data writing is completed (Step S180), and the frame memory unit 21 in the board 20 is switched to the frame memory 211 (or 212) in which the image data writing is completed (S182). Subsequently, the identification number ID No.  $i$  is set to 0 (Step S184), and the front and rear flag FBFLG is set to 0, i.e., the flag is set to the front LED 318 (Step S186).

Subsequently, the start address ( $H_s$ ,  $V_s$ ) of the trace block labeled in correspondence with the front LED 318 of the car of ID No. 0 is set (Step S188). In other words,

$$H_s = FH[i] \cdot (BS/2) + AFH[i]$$

$$V_s = FV[i] \cdot (BS/4) + AFV[i]$$

The correction amounts  $AFH[i]$  and  $AFV[i]$  are given by implementing the flowchart of Interrupt II.

As shown in Fig. 24, a quotient is set at 4 in the address  $V_s$  in view of the fact that there is 1/2 scanning line although the image stored in the frame memory is read as a binary data by the frame. In this way, a square trace block can be obtained.

Subsequently, it is judged based on the board identification flag BDF whether the front LED 318 of the car of the ID No. 0 is detected by the boards 10 or by the board 20 (Step S190). If the board identification flag BDF is "0" (YES in Step S190), it is judged that the front LED 318 of the car of the ID NO. 0 is detected by the board 10, and the start address ( $H_s$ ,  $V_s$ ) set at Step S188 is output to the start setting circuit 141 of the board 10 (Step S192).

On the other hand, if the board identification flag BDF is "1" (NO in Step S190), it is judged that the front LED 318 is detected by the board 20, and the start address ( $H_s$ ,  $V_s$ ) set at Step S188 is output to a start setting circuit 241 in the board 20 (Step S194). This subroutine returns after the reading of the data in the trace block is started (Step S196). The reading of the data for the front LED 318 of the car 3 of ID No. 0 is carried out in the data accumulating circuit 18 in the board 10 or in the data accumulating circuit 28 in the board 20.

By setting the start address ( $H_s$ ,  $V_s$ ) such that the position of the LED 318 (or 319) is located in the center of the trace block, the movement of the car 3 can securely be traced after one frame cycle independently of the running direction of the car 3, in other words, independently of the car 3 running in any angle in 360 degrees over the plane.

Particularly, since the correction amount set based on the running speed and the direction factor is considered as described later, the tracing can be made more secure. Instead of setting a specified traceable correction amount based on the preset highest speed of the car 3, the correction amount may be changed real-time depending upon the present running speed of the car 3 (obtained by dividing a difference between the detected positions in the last 2 frames by the frame cycle). This enables the front and rear LEDs 318 and 319 to be located as close to the center of the trace block as possible, thereby preventing the tracing error.

Figs. 21 to 23 are flowcharts showing the Interrupt II.

The Interrupt II is started in response to an interrupt signal generated each time the address designation of the trace block by the H-, V-counter 142 (242) is completed. First, it is judged whether the count value of the counter  $i$  is smaller than 7 (Step S210). If this count value is not smaller than 7 (YES in Step S210), this routine returns upon the judgment that the tracing has been completed within one frame.

First, the position of the front LED 318 of the car 3 of ID No. 0 is detected. If the count value of the counter  $i$  is smaller than 7 (NO in Step S210), the dot number is read from the dot counter 183 (Step S212). It is then judged whether the dot number is 0 (Step S214). If the dot number is 0, a position tracing error flag PEF is set (Step S216), and ( $H_c$ ,  $V_c$ ) = (-1, -1) are set as a specific position data (Step S218). A position tracing error can be confirmed by this data or by monitoring the error flag PEF, and an alarm is given upon detecting the tracing error. Alternately, the trace block may be made larger than a predetermined size in case of such errors, so that the tracing can be further continued.

On the other hand, if the dot number is not 0, the coordinates accumulation data in the H- and V-directions are read from the latch circuit 182 upon the assumption that the tracing was completely made (Step S220). At this time, if the latch circuit 182 undergoes an overflow (NO in Step S220), the coordinates accumulation data are corrected (Step S224). This correction is made, for example, based on the previous center of gravity position of the LED 318 (or 319) and the

$$H_s = FH[i] \cdot (BS/2) + AFH[i]$$

$$V_s = FV[i] \cdot (BS/4) + AFV[i]$$

- 5 the count value  $i$  is incremented by 1 (Step S278), and the counting is started (Step S252), thereby repeating the aforementioned operations for the trace block of the next car 3.

Referring back to Fig. 16, after transferring the calculated values upon the completion of the Interrupt II, the identification number ID No.  $i$  is set to 0 (Step S70), and any more interrupt is prohibited (Step S72). The position data of the front and rear LEDs 318 and 319, i.e.,  $RFH[i]$ ,  $RFV[i]$  and  $RBH[i]$ ,  $RBV[i]$  are read from the buffer (Step S74). The interrupts  
10 are allowed again upon the completion of this reading (Step S76). Since the data transfer by the Interrupt II is repeated between Steps S68 and S90, Steps S72 and S76 are provided to prevent the reading of the erroneous data even if the reading of the data from the buffer and the data transfer by the Interrupt II are carried out at the same timing.

The relationship between the position of the car 3 and the front and rear LEDs 318, 319 is predetermined. For example, the position of the car 3 may be an intermediate position of the front and rear LEDs 318 and 319. Upon  
15 determining the position of the car 3, the race development data, i.e., a goal position data and the speed data are set (Step S78). The goal position data is given to each car, and is a position data for designating passing points on the race track RC at specified intervals.

The running direction of the car 3 is calculated based on the present goal position and the detected position of the car 3 (Step S80). Further, a direction correction amount of the car 3 is calculated based on a target direction (direction  
20 toward the goal position) and the facing direction of the car 3 (which is calculated based on the positions of the front and rear LEDs 318 and 319 of the car 3). If the goal direction is calculated based on the data in three points: the present position, the next position and the further next position, the car 3 is capable of running more smoothly along the predetermined course. The speed and the direction are instructed to the car 3 based only on a goal speed data. More specifically, the speed instruction is given to one of the specific wheels, e.g., the motor 313 for driving the wheel 311, and  
25 the direction instruction is given in the form of a speed difference from the rotating speed of the motor 313. The direction can also be controlled by individually instructing the rotating speeds to the respective motors 313 and 314.

The obtained goal speed data is transmitted to the car 3 of the corresponding ID number via the transmission LEDs 7 (Step S82), and the count value of the counter  $i$  is incremented by 1 (Step S84). It is then judged whether the count value of the counter  $i$  is larger than 7 (Step S86). This routine returns to Step S72 if this count value is not larger than  
30 7. If this count value is larger than 7, a system reset signal is checked (Step S88). The system reset signal is output in the case where an abnormality occurs in the system or when the race finishes.

If the system reset signal is not reset (NO in Step S90), this routine returns to Step S70 in which the count value of the counter  $i$  is set to "0". In this way, the running control for the cars 3 is continued until the race finishes. On the other hand, if the system reset signal is reset, this routine ends upon the judgment that the race has finished.

35 Although the initial position recognition (Steps S46 and S54) and the position detection during the tracing are performed by the different circuits in this embodiment, they may be performed by the single circuit. Further, although the position recognition is performed by individually turning on the front and rear LEDs 318 and 319 in the initial position recognition, it may be performed as follows. First, only the front LED 318 is turned on, and the front and rear LEDs 318 and 319 are turned on at a next timing. The position of the rear LED 319 is recognized by omitting the already recognized  
40 position of the front LED 318. This method requires only three kinds of control signals for the front and rear LEDs 318 and 319: one for turning the both LEDs 318 and 319 off, one for turning only the front LED 318 on, and one for turning the both LEDs 318 and 319 on. Further, a waiting period may be set based on the factor other than the frame in order to prevent a delay between the timing at which the front and rear LEDs 318 and 319 are turned on and the image pick-up timing so that the image can be securely picked up while the LEDs 318 and 319 are on.

45 Although members for emitting and receiving infrared radiations are used as communication means between the car 3 and the machine main body in the foregoing embodiment, members for transmitting and receiving radio waves or ultrasonic waves may also be used.

Although the cars performing a car race are controlled in the foregoing embodiment, the invention is not limited to this. The invention may be applied to another race game such as a horse race or a boat race, or may be applied to  
50 control a specific movement of one movable object.

Further, the invention is not limited to the control for the movable object on the surface (including a curved surface), but may be applied to a control for a movable object which moves linearly along a line, fly or floats in the air or in the liquid.

Further, in the foregoing embodiments, when a portion of the trace block comes outside the frame memory, a new trace block is set in the opposite frame memory to enable tracing. However, a new trace block may be set when the trace  
55 block goes beyond the border line. Alternatively, a new trace block may be set when the running car 3 comes across the border line.

Although the trace block is used to detect the position of the running car 3 in the foregoing embodiment, the invention is not limited to this. The frame memory may be integrally scanned to detect the position, instead of the use of trace



a calculating portion which calculates a position of the movable object based on the counted number and the accumulated coordinate values.

- 5 6. A position detecting system as defined in claim 3, wherein the designator includes:
  - a moved amount calculating portion which calculates a moved amount of the movable object based on the calculated position of the movable object; and
  - a designating portion which designates an address block based on a previously calculated position of the movable object and the calculated moved amount.
- 10 7. A position detecting system as defined in claim 1, wherein each of the first and second light sensors is provided with a lens for focusing a light image on a surface of the light sensor.
- 15 8. A position detecting system as defined in claim 1, wherein the light emitter is operable to emit light lying outside a frequency band for visible radiations; and each of the first and second light sensors is operable to receive only light lying in the same frequency band of light emitted by the light emitter.

20

25

30

35

40

45

50

55

FIG. 1

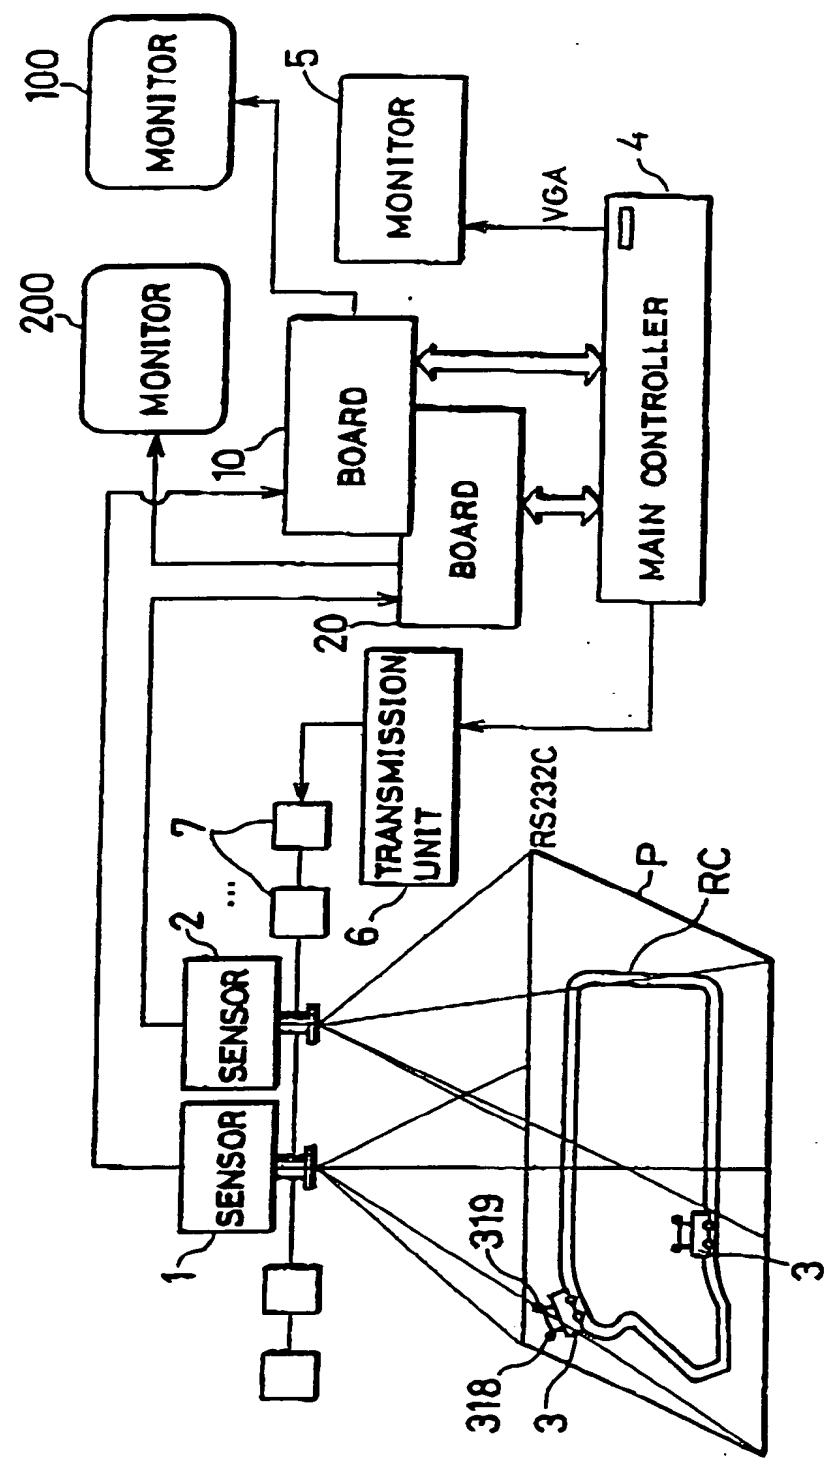


FIG. 2

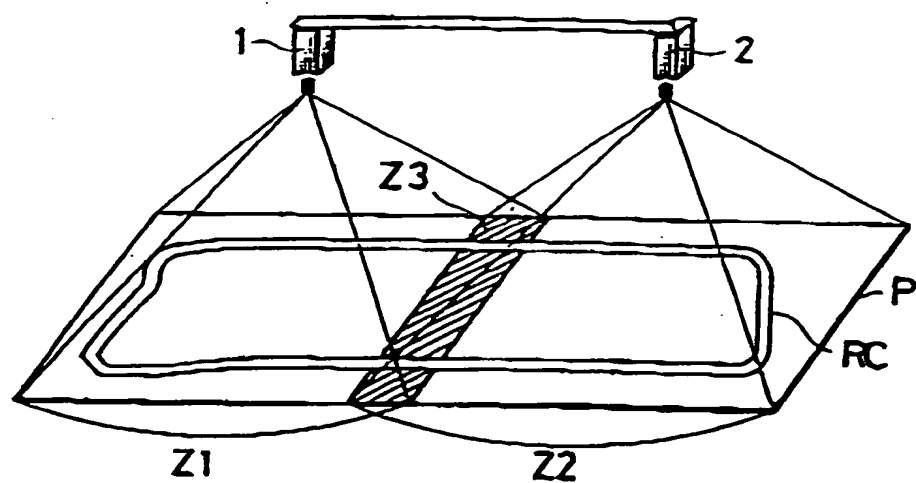


FIG. 3

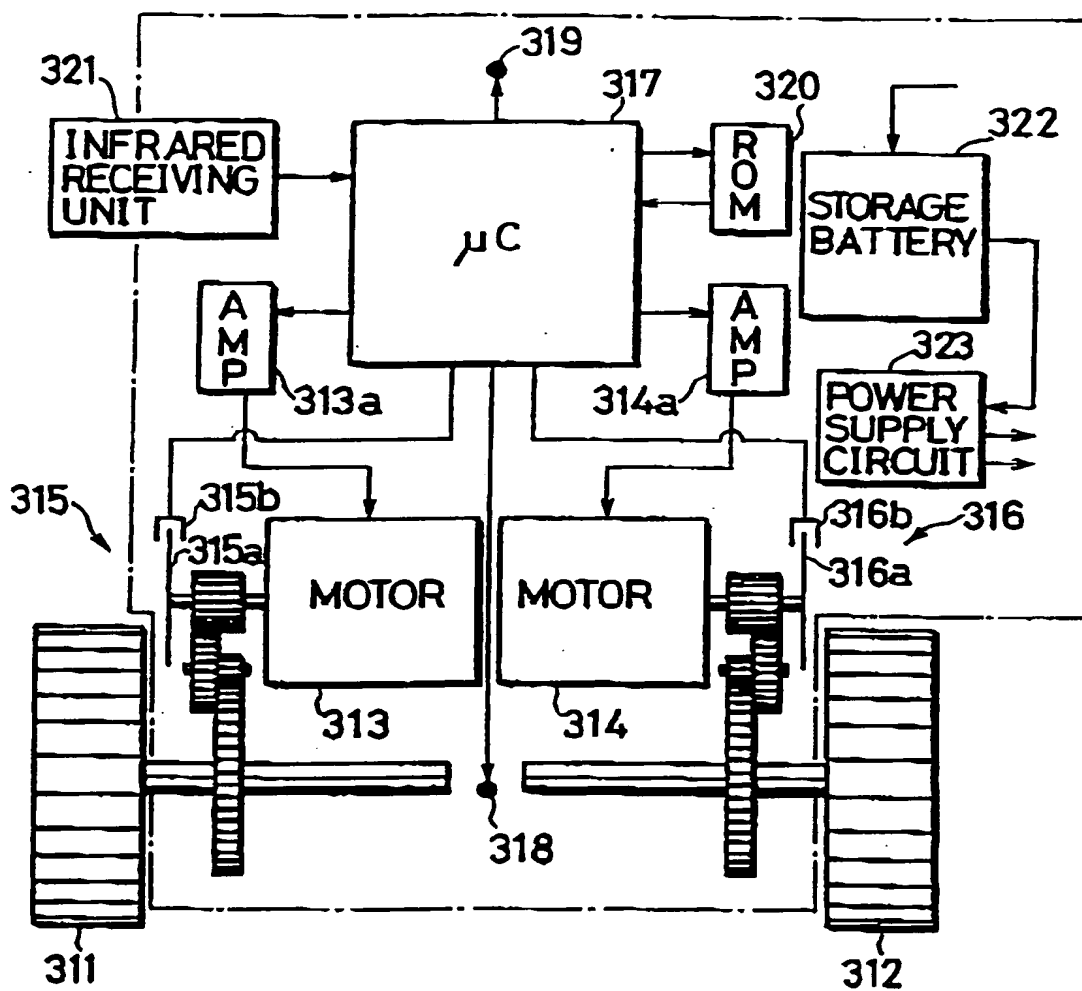


FIG. 4

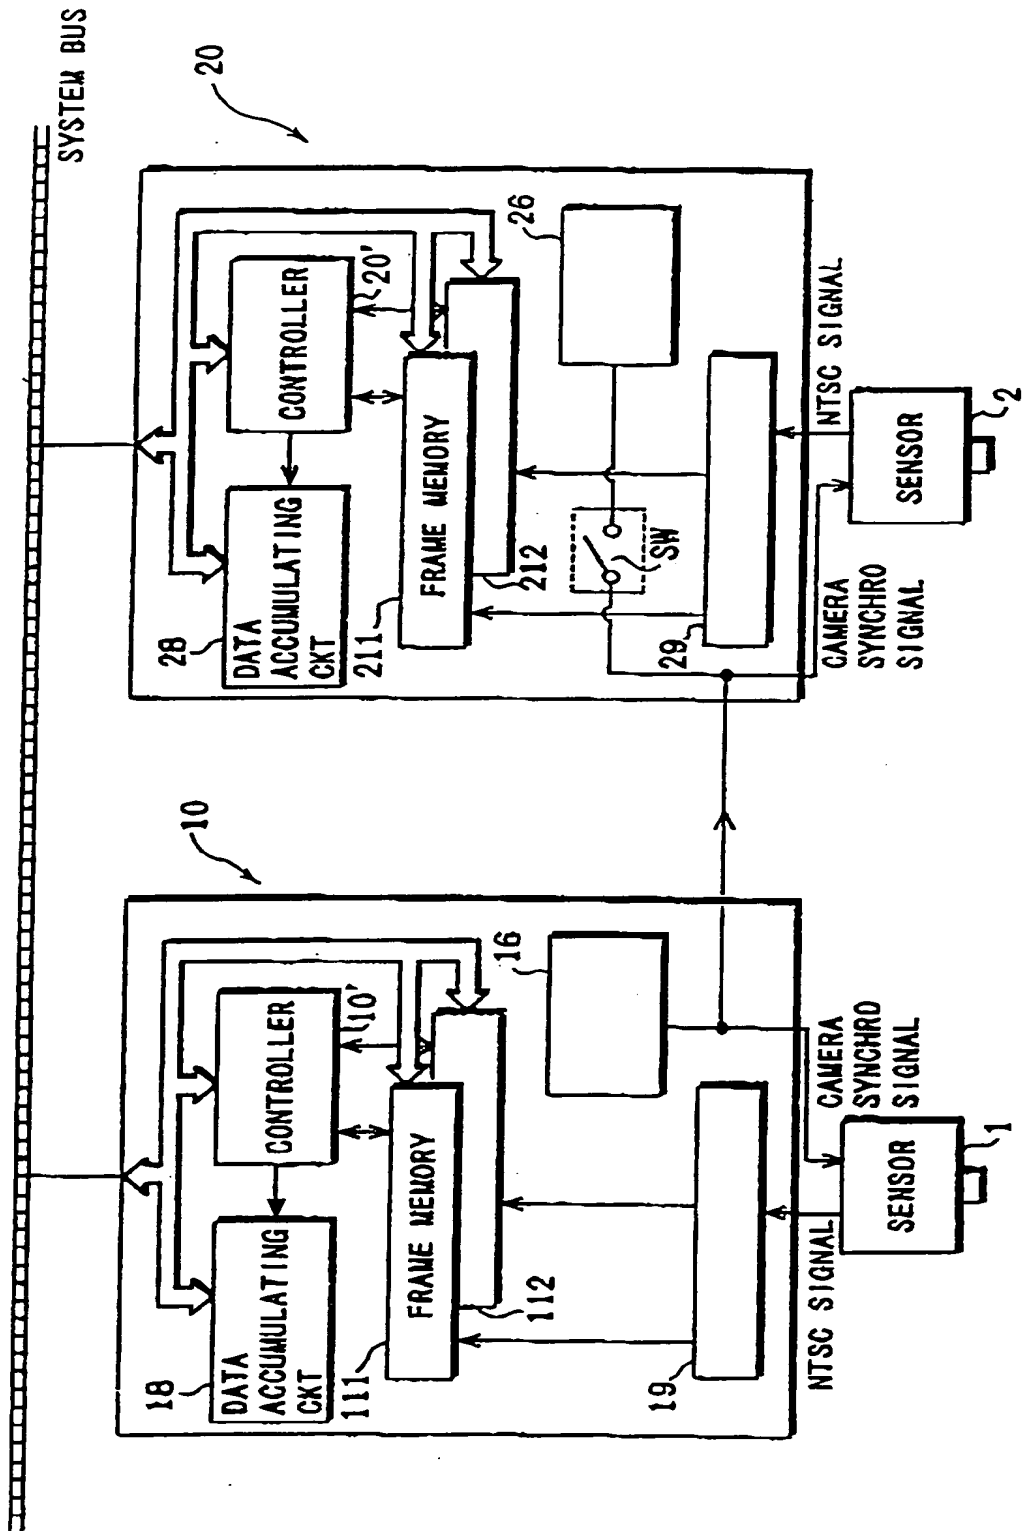


FIG. 5

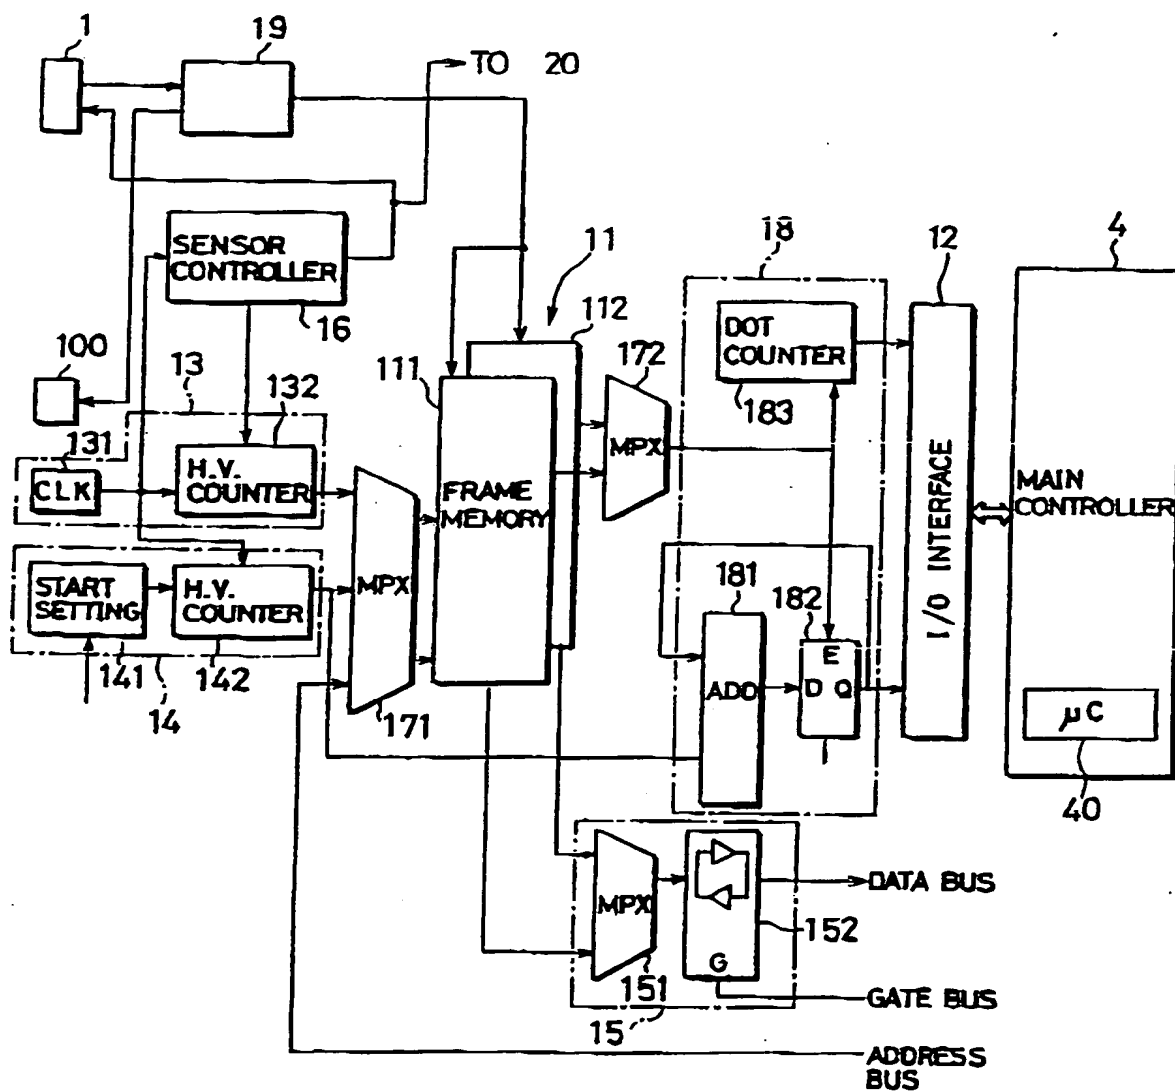


FIG. 6

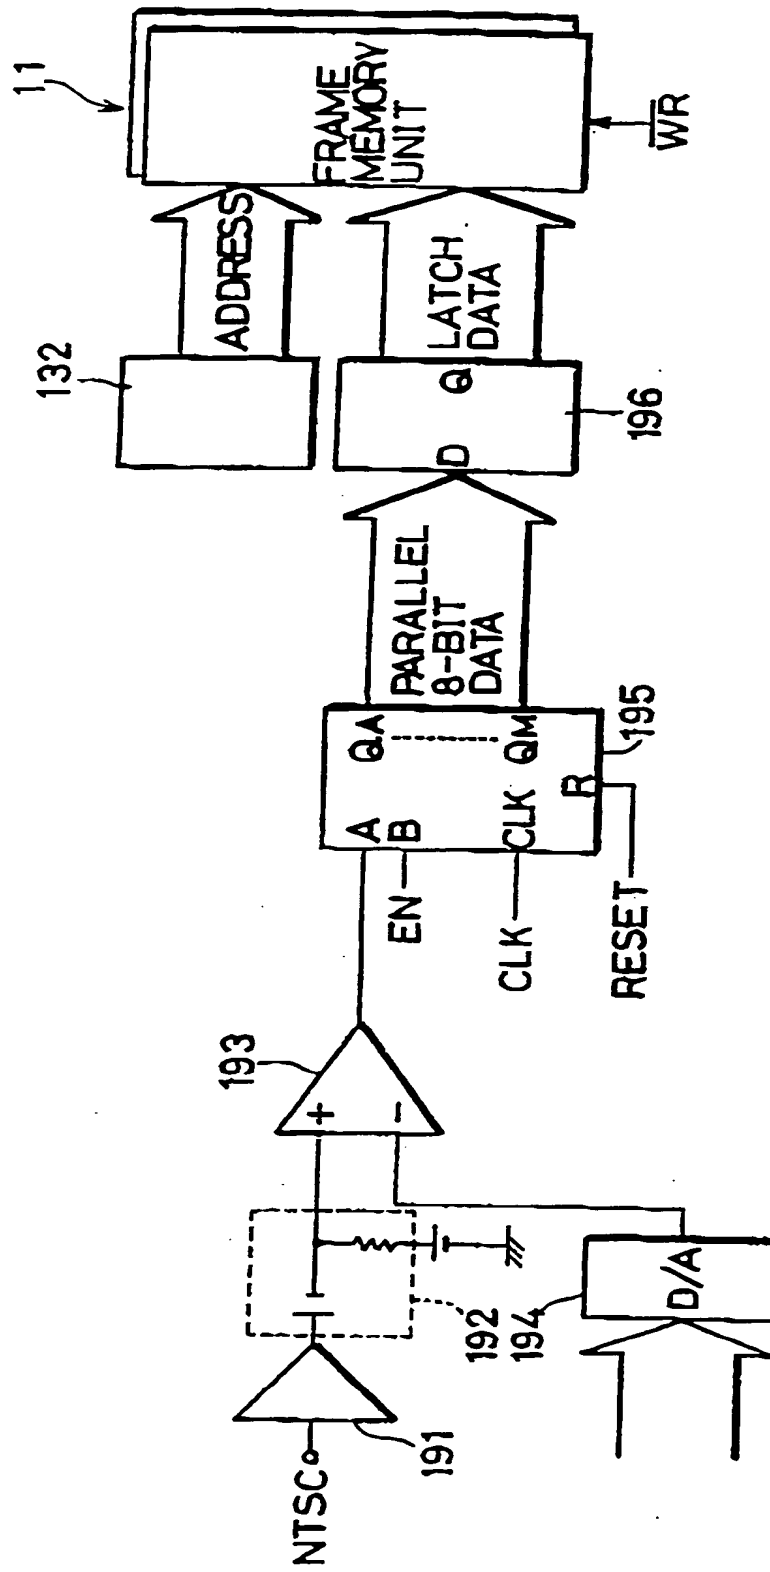


FIG. 7

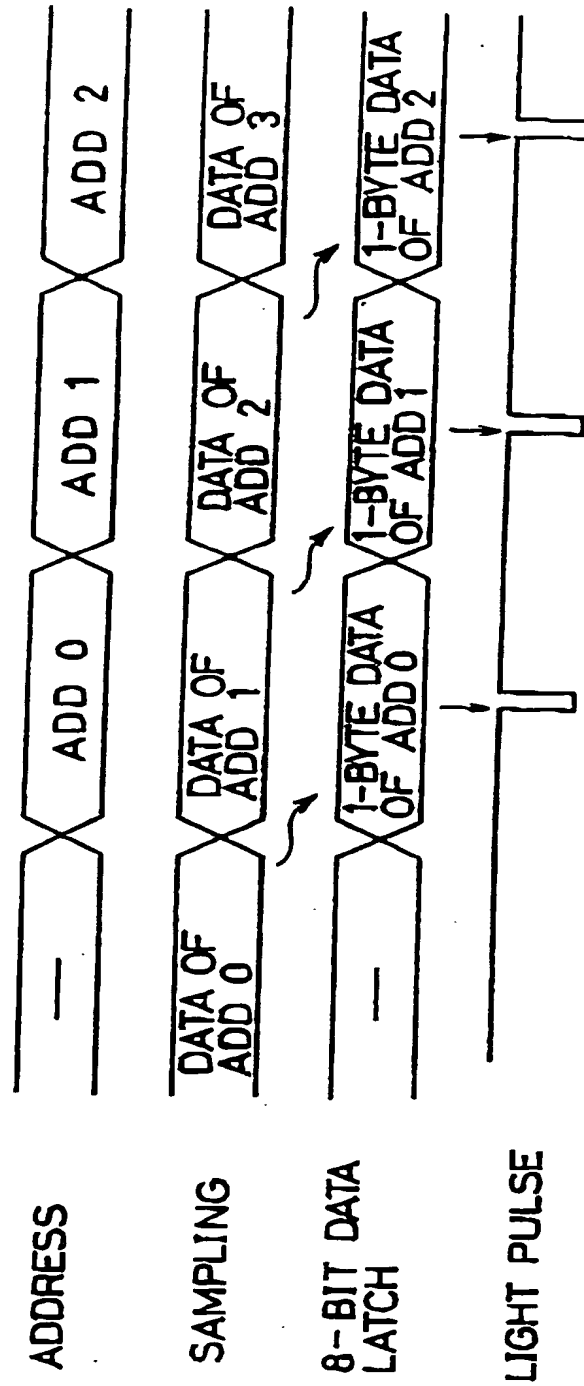




FIG. 8A

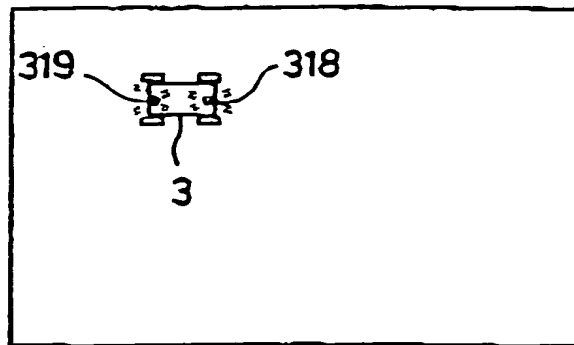


FIG. 8B

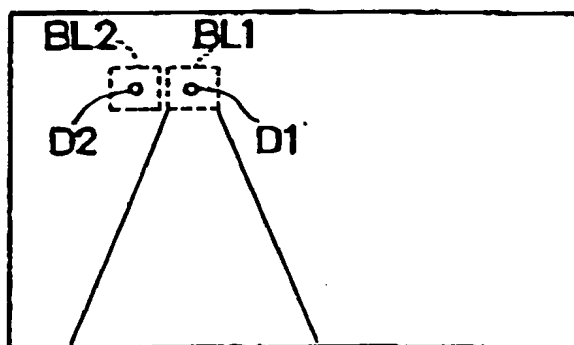


FIG. 8C

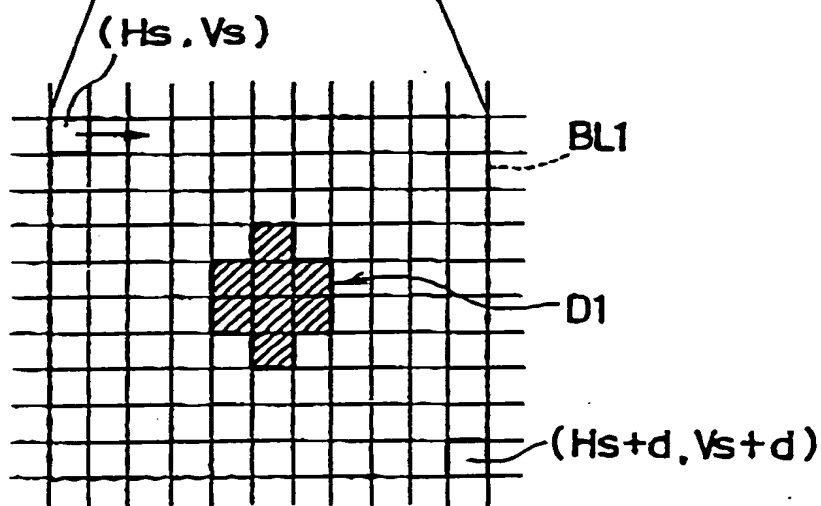


FIG. 9

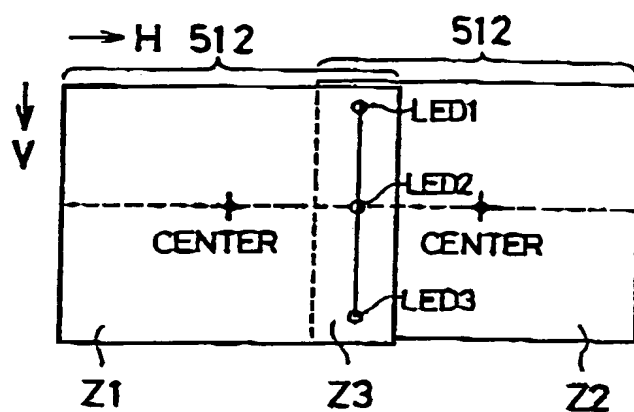


FIG. 10

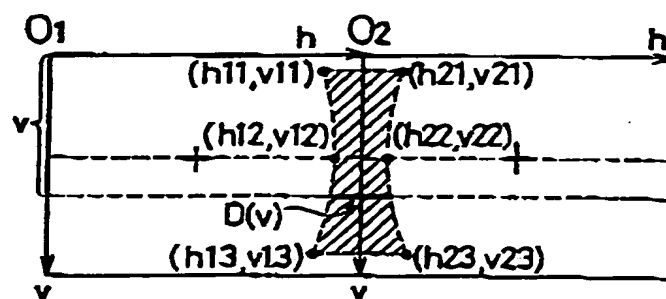
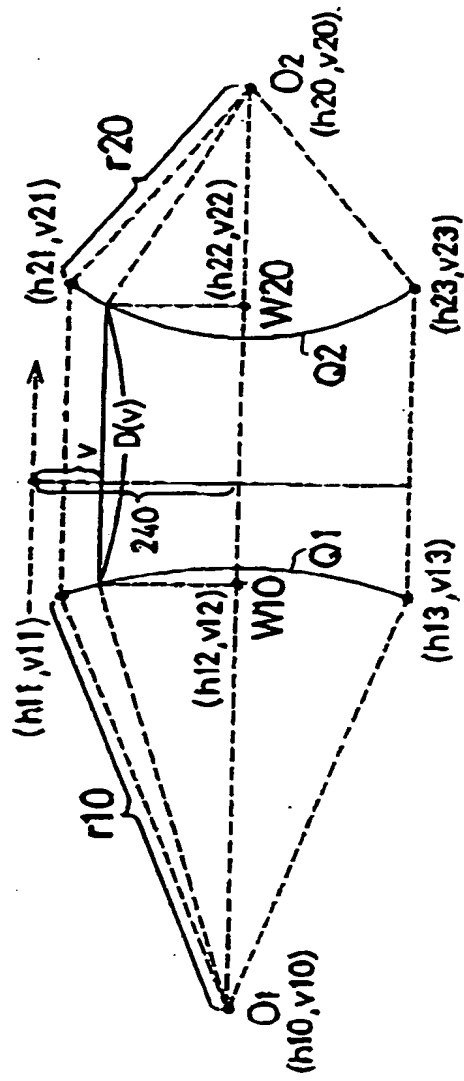


FIG. 11



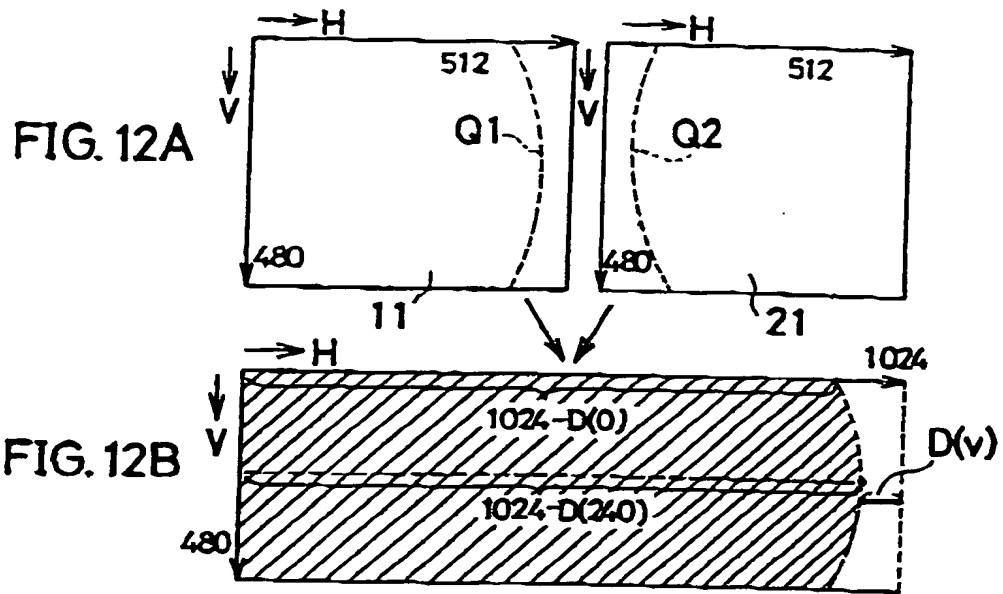


FIG. 13

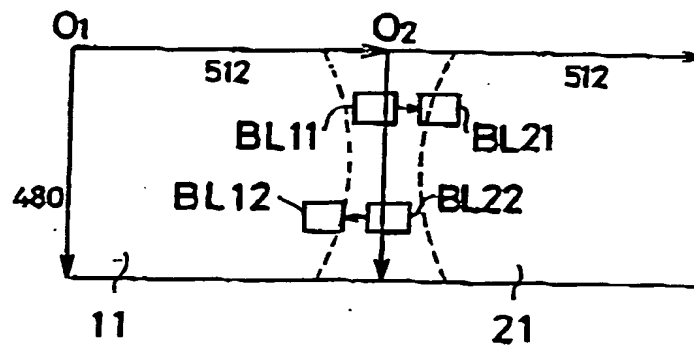


FIG. 14

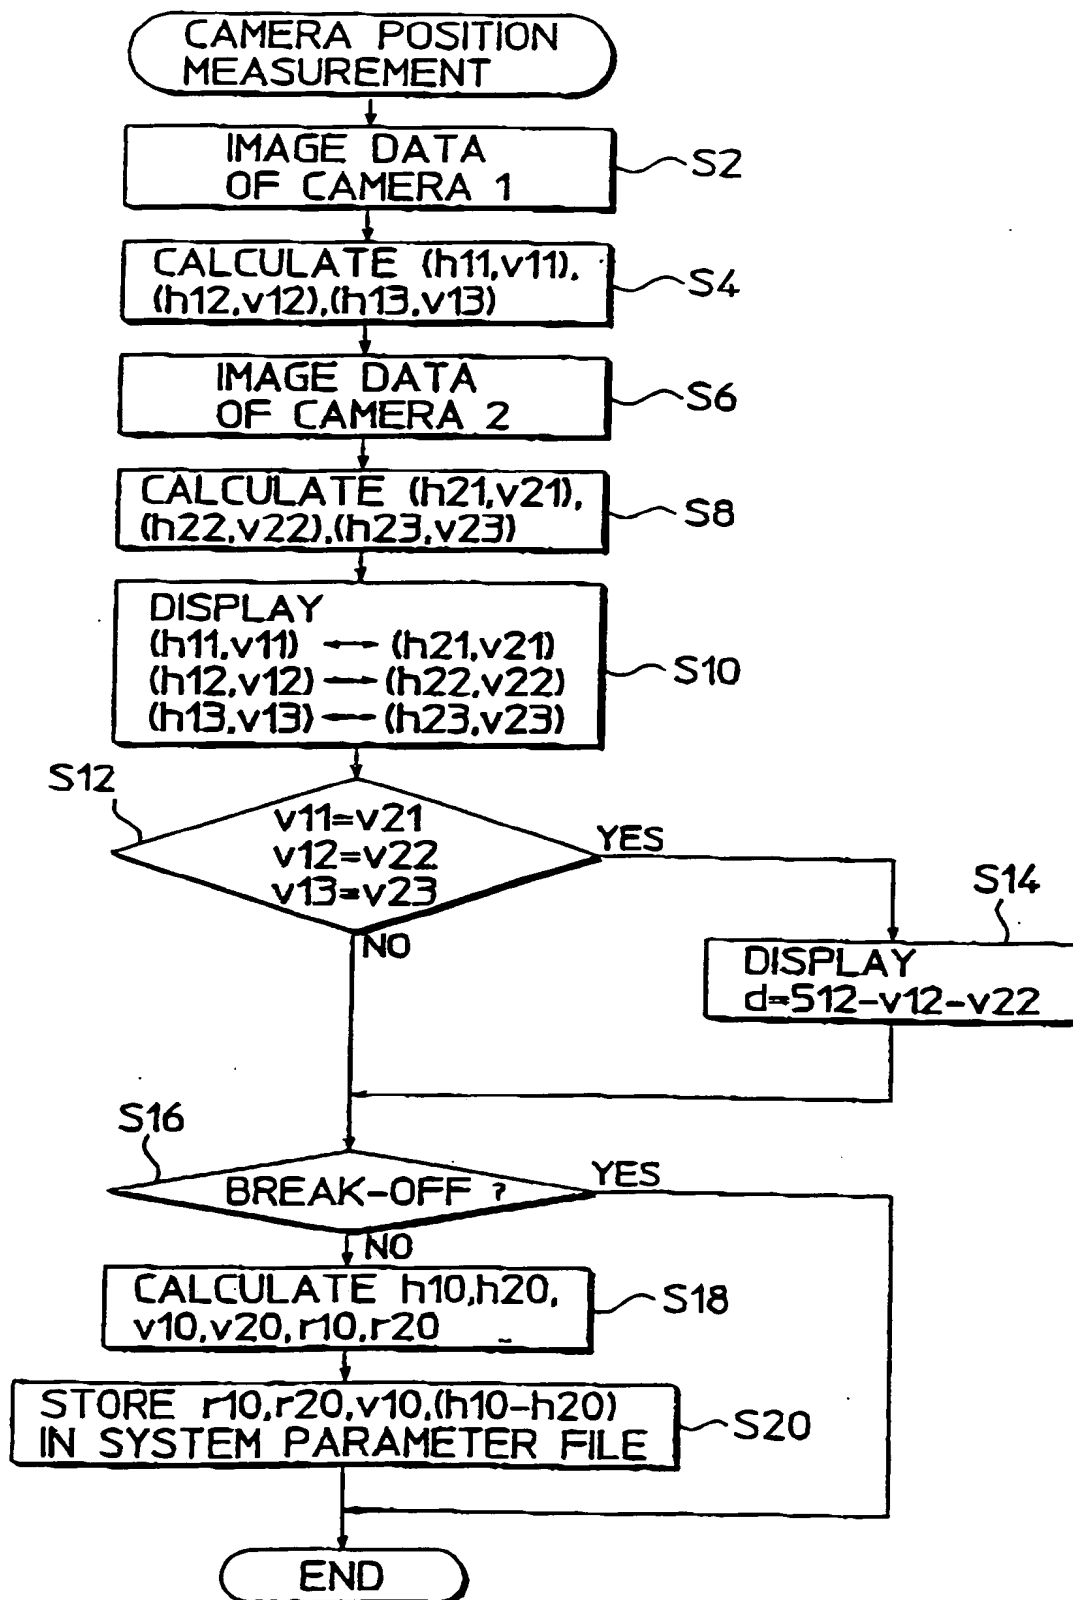


FIG. 15

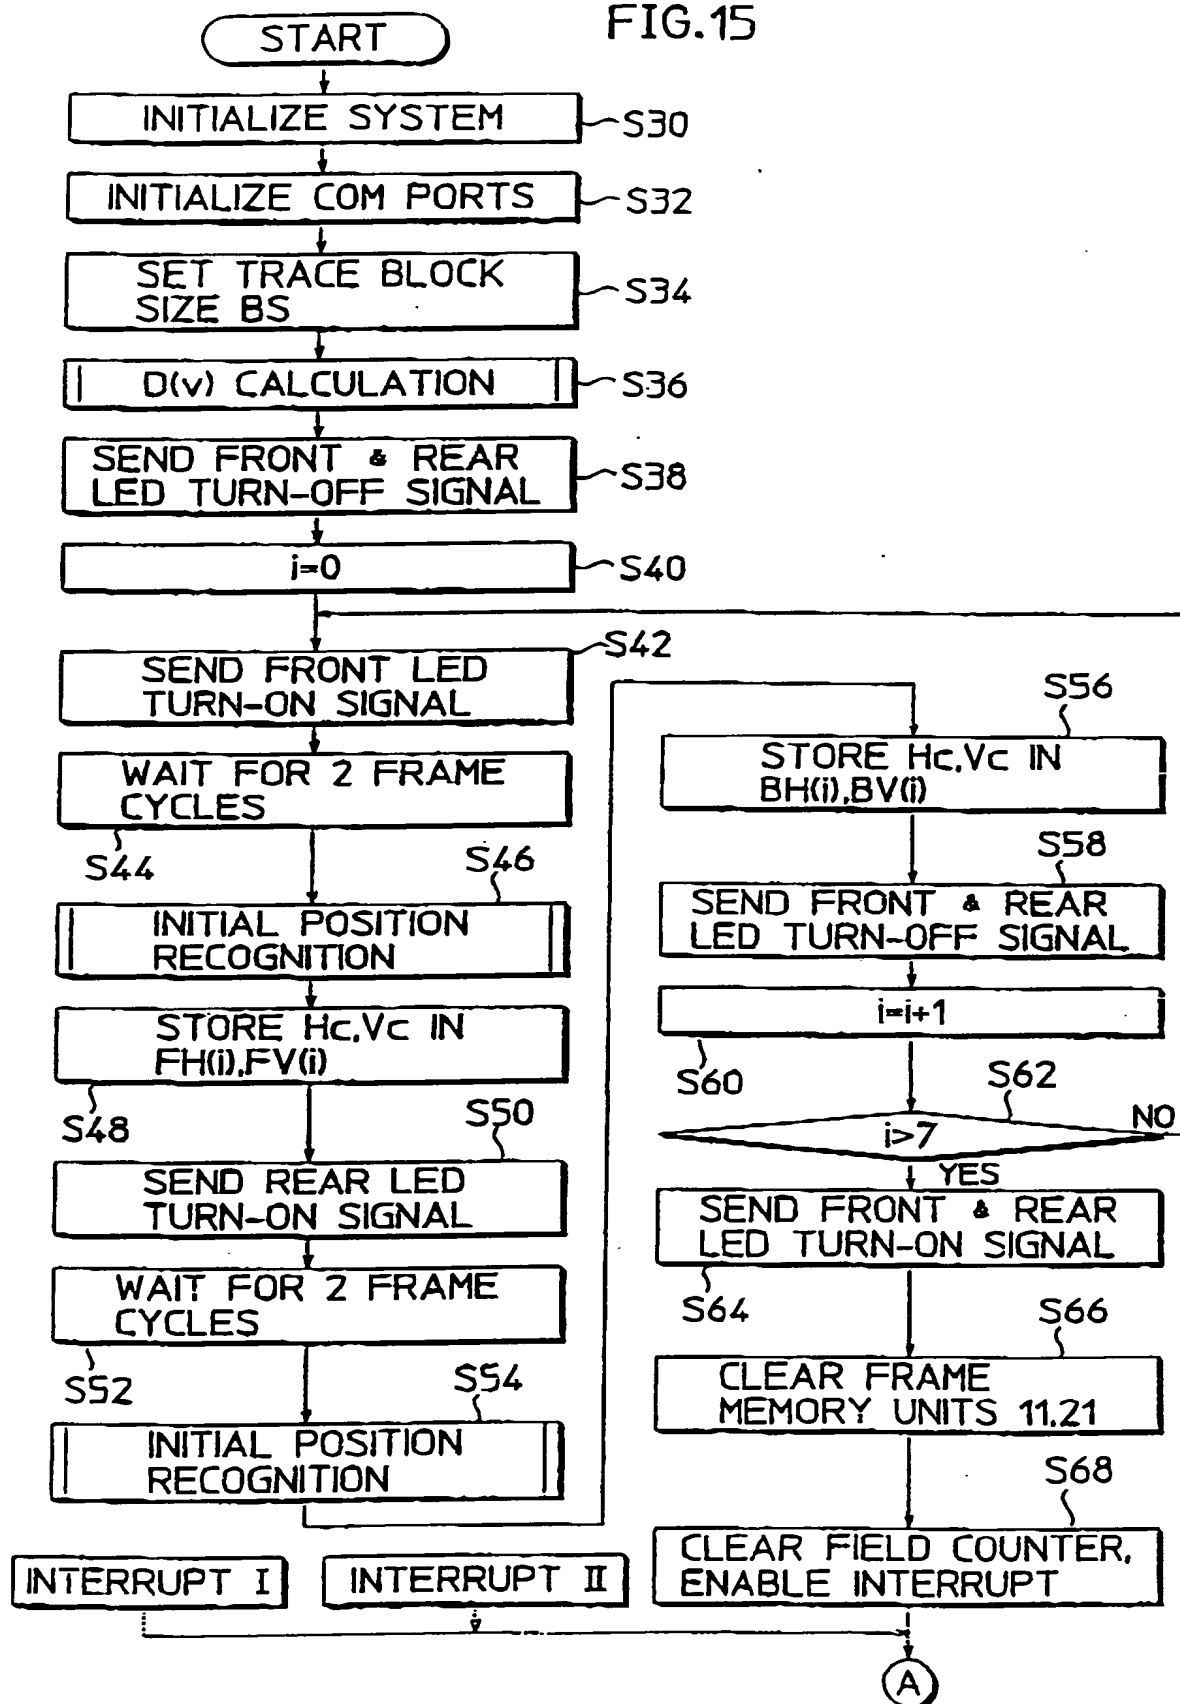


FIG.16


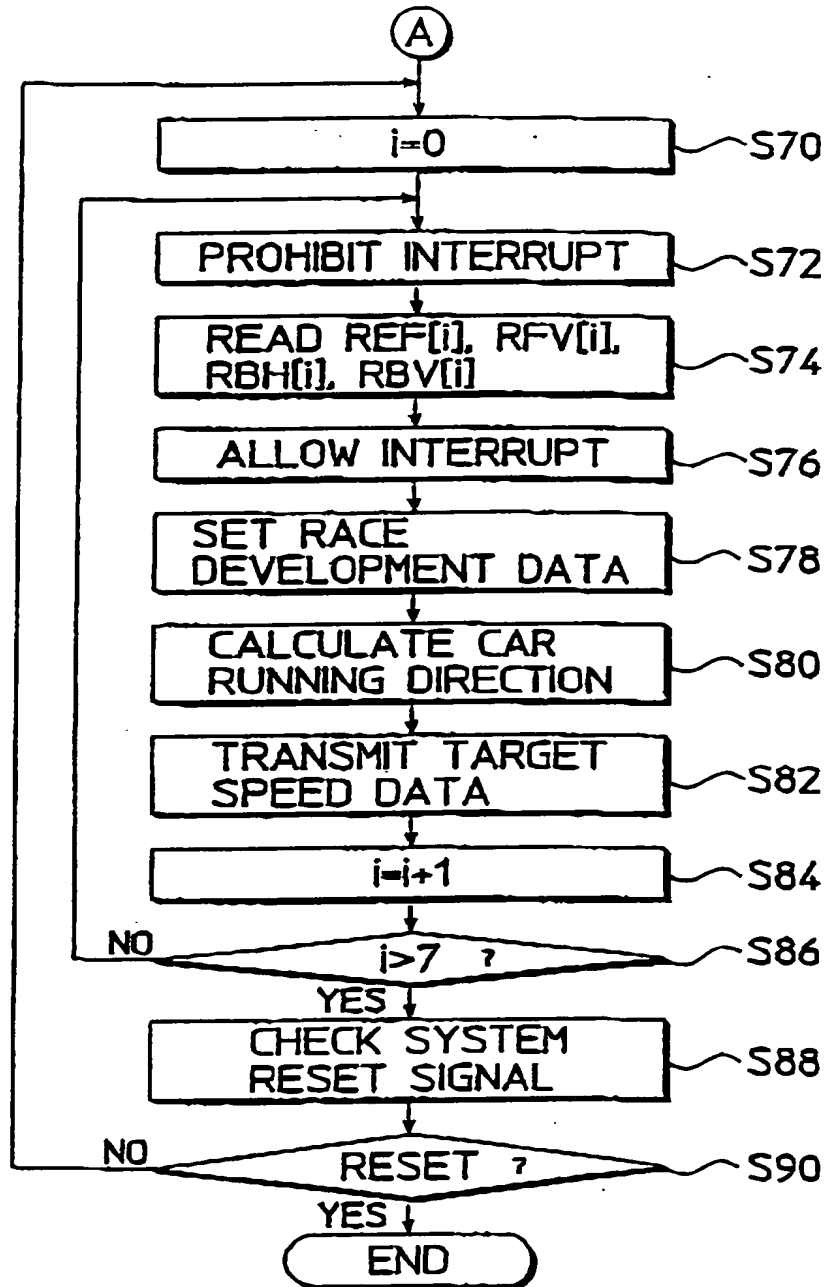


FIG. 17




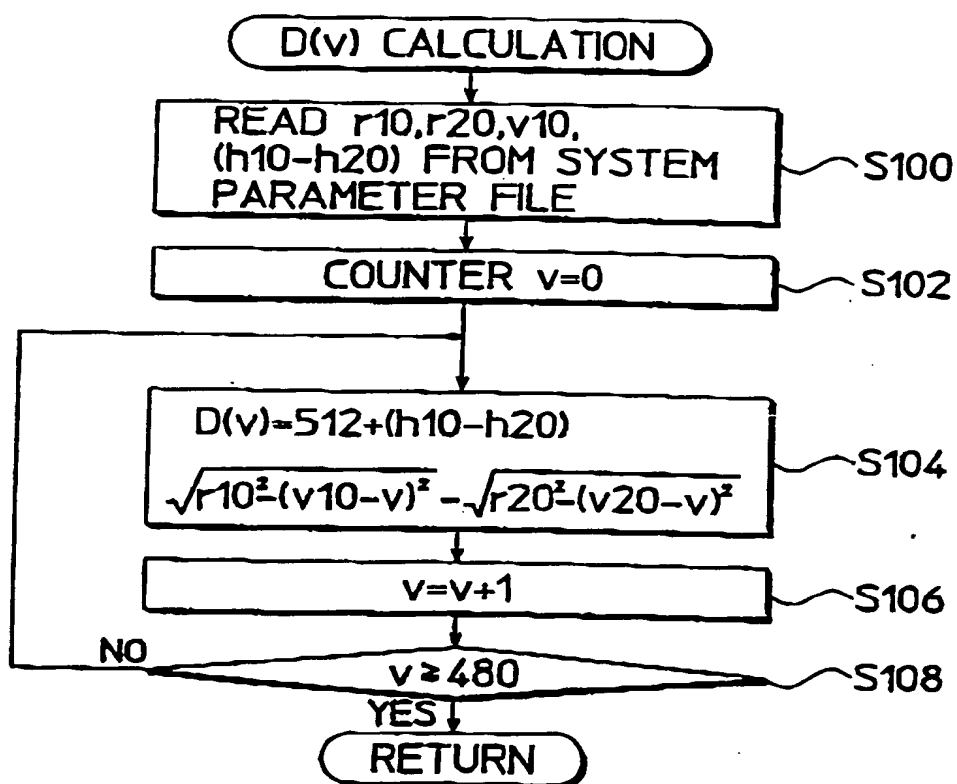

2000年 2月 18日(火) 19:16/登録19:10/文書番号4603897196 P 36




FIG. 19

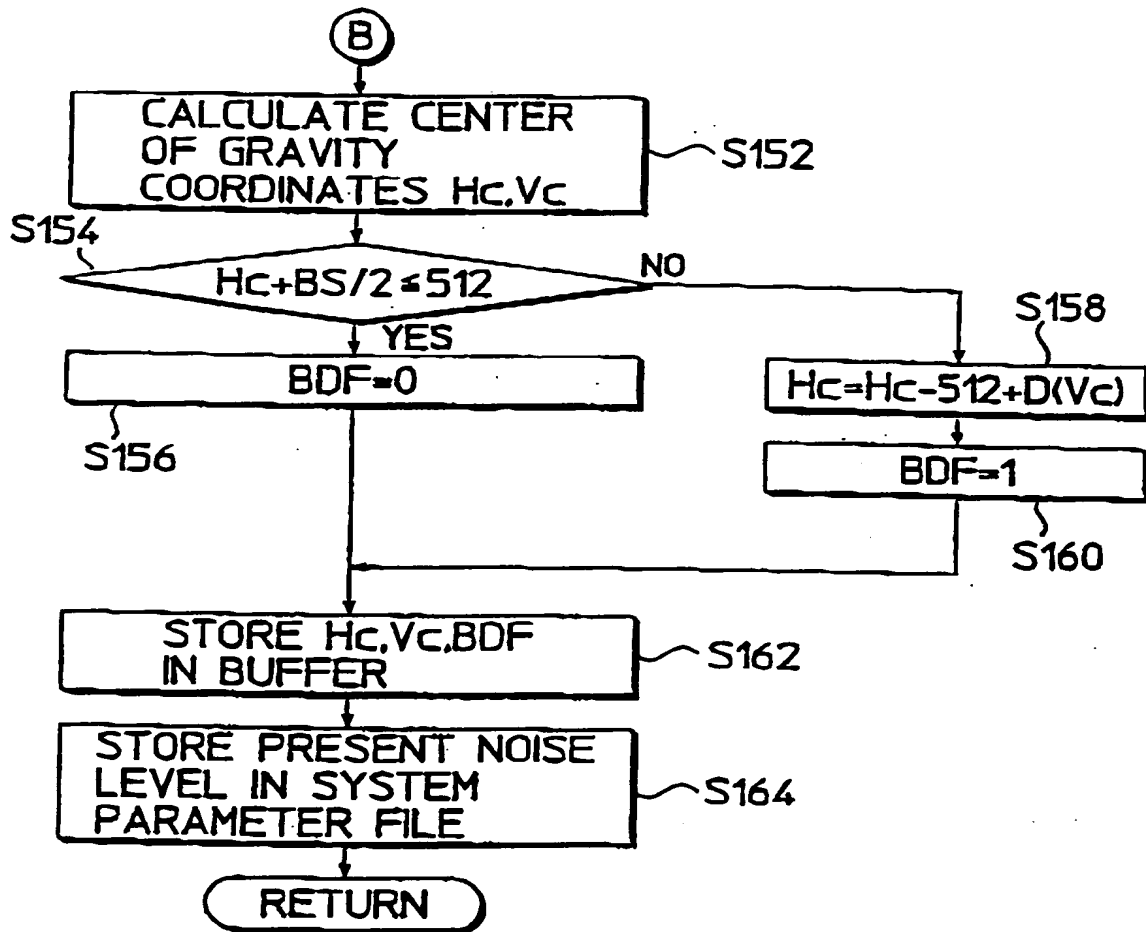

FROM DT: 03-5425-7187



FIG. 21

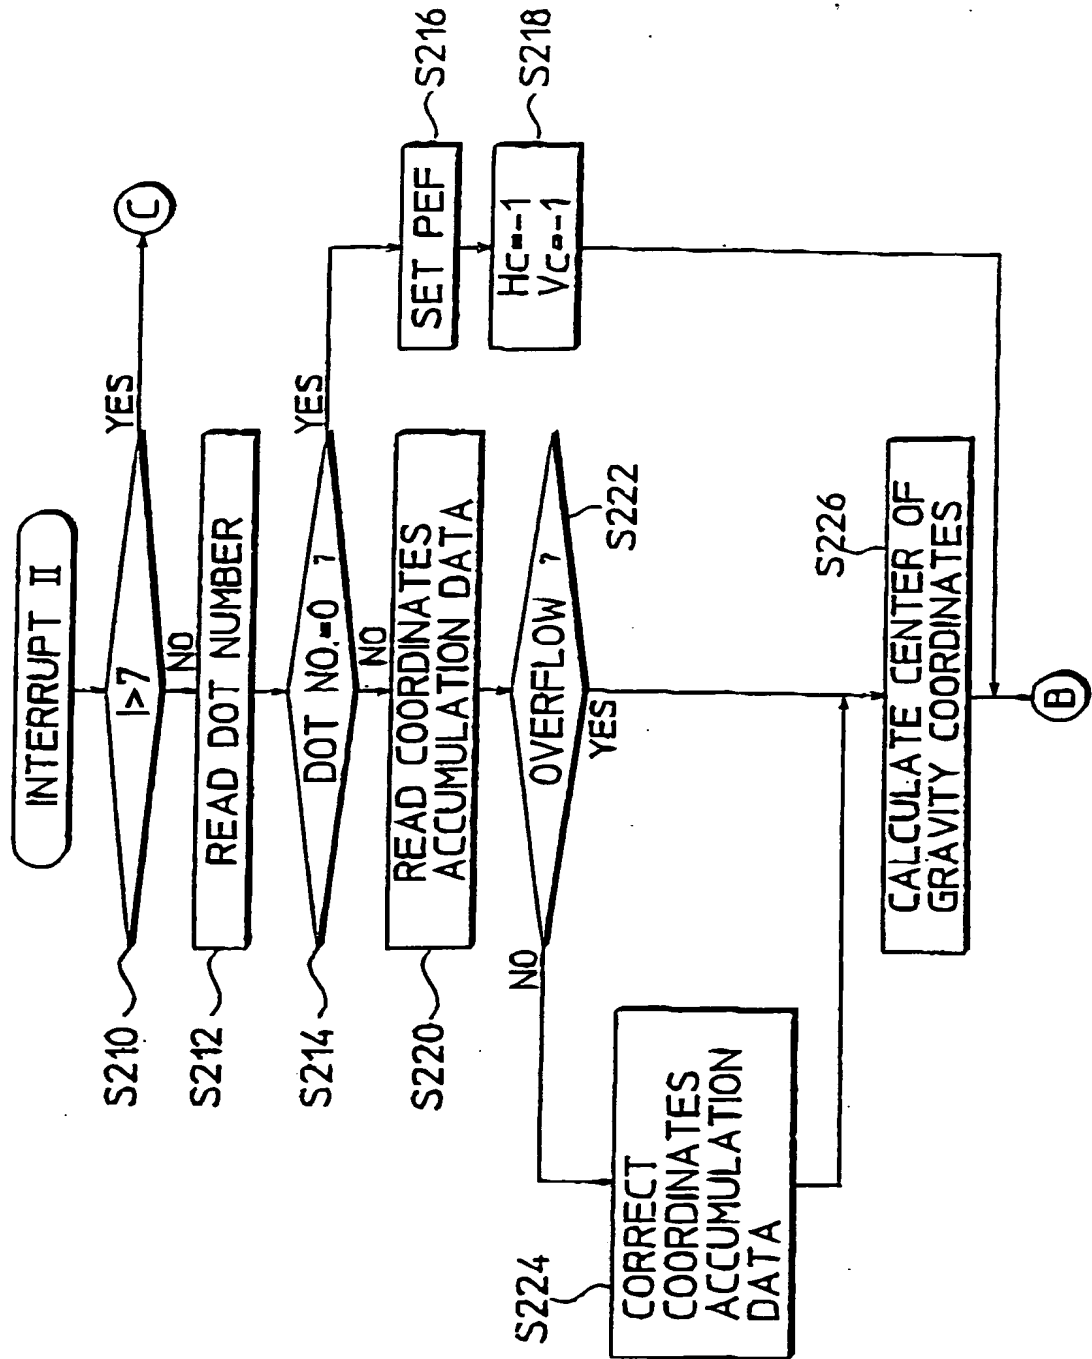

FROM 03-5425-7187



FIG. 23

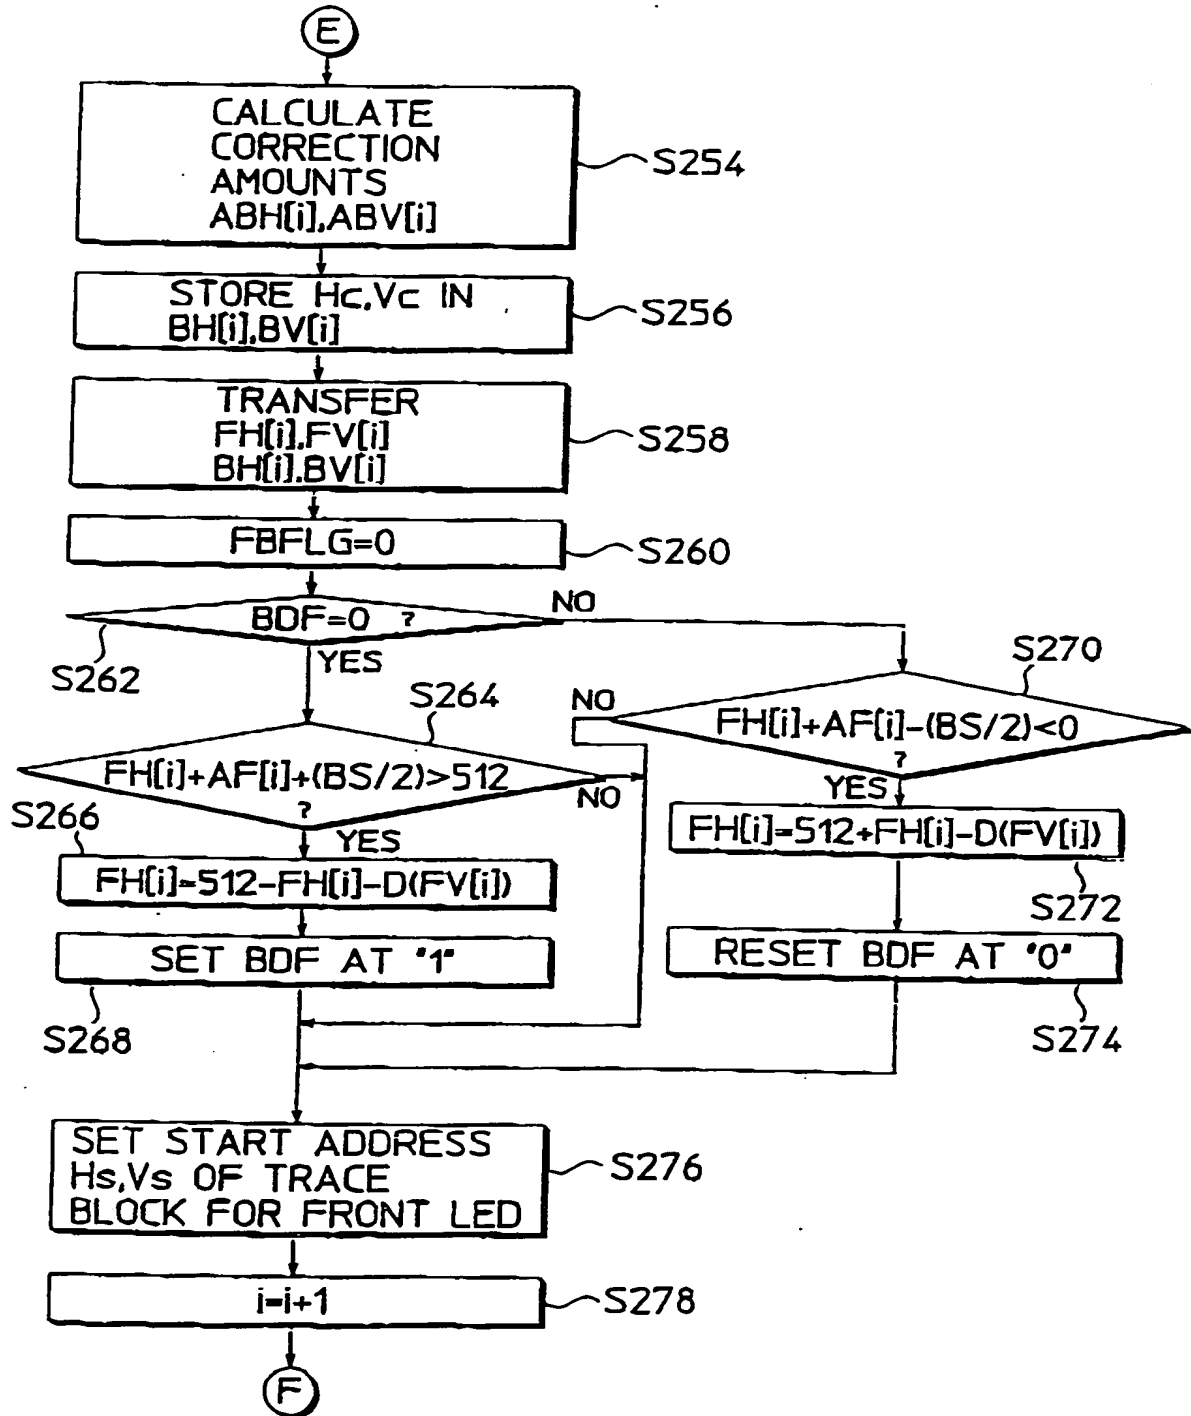


FIG. 24

